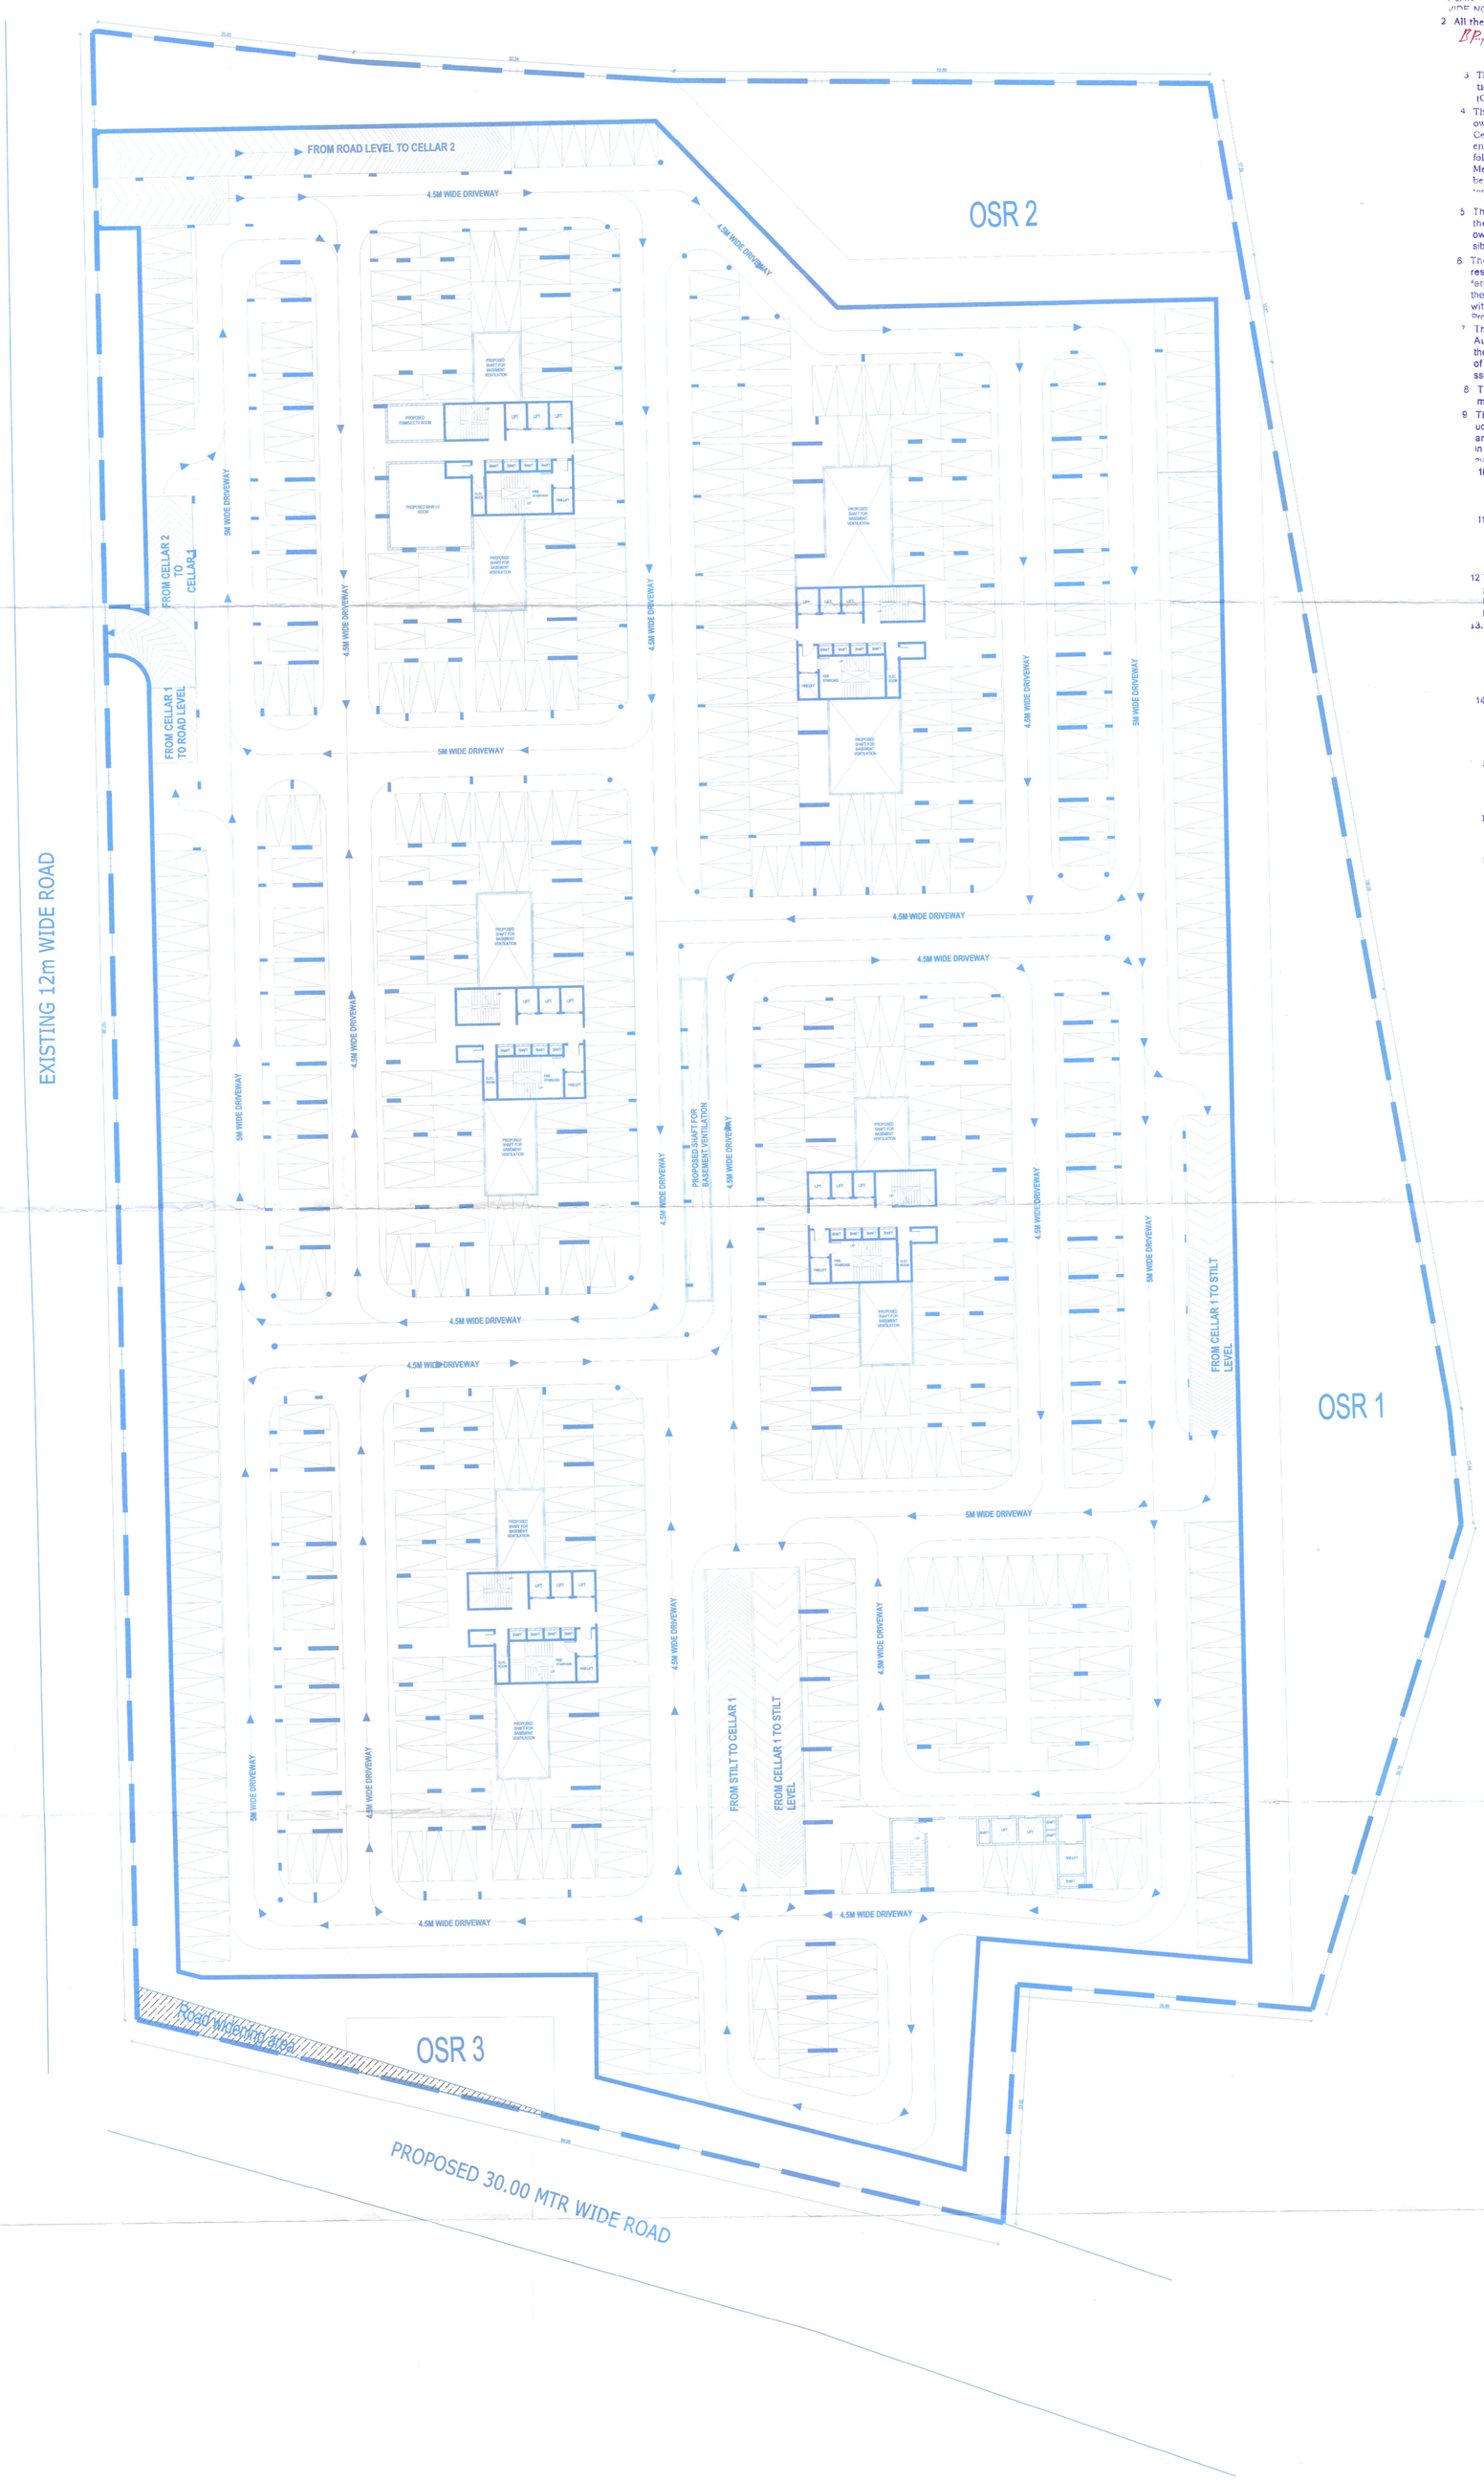


TECHNIC APPROVAL IS HERE B ACCORDED FOR ONLY.....
DWELLING UNITS UNDER SECTION 20(2) I, II OF HYDERABAD METROPOLITAN DEVELOPMENT AUTHORITY ACT 2008 & FORWARDED TO THE MUNICIPALITY/LOCAL BODY FOR FINAL SANCTION SUBJECT TO CONDITIONS MENTIONED ON APPROVED PLAN / CORRECTED PLAN VIDE NO..... DT. 10/07/2023.

2 All the conditions imposed in Lr. No.... 001610/ TP/HMDA/EAUI/GHT/2023 are to be strictly fulfilled.

3 This approval does no bar the application of the provision of the Urban Land (Ceiling & Regulation) Act, 1976.

4 The local authority shall ensure than ownership clearance (and Urban Land Ceiling/clearance of the site under reference are in order and should scrupulously follow the Government instructions vide Memo No.1933/1/11/97 MA, dt 18-6-97 before sanctioning and releasing these technical approved building plans.

5 This approval does not confer or affect the ownership of the site Authority of ownership site boundary is the responsibility of the applicant.

6 The Builder/Developer/Owner shall be responsible and ensure the the five safety structural stability requirements of the proposed complex are in accordance with the National Building Code, 2005 Provisions

7 The Commissioner of Municipality/Local Authority should physically take over the land shown in Road widening at free of cost before releasing Building permission as per statutory Master Plan/Z D F

8 The Celler/Stilt parking should not be mis-used for any other purpose.

9 The Builder/Developer should construct sump, drainage as per ISI Standards and to the satisfaction of Municipality in addition to the drainage system available

10. THAT THE APPLICANT SHALL COMPLY THE CONDITIONS LAID DOWN G.O.MS. NO: 470 M.A. Dt: 8-7-2008, G.O.M.S.NO. 168 M.A. Dt; 7-4-2012 AND ITS ENDOWMENTS.

11 The applicant shall obtain necessary clearnce from the FIRE SERVICES DEP--ARTMENT for the proposed Apartment complex/Building as per the provisional of A.P. FIRE SERVICES ACT, 1999.

12 This permission does no ... ty public agency Include HMDA/Local Body to acquire the lands for public purpose as per Law.

13. Two numbers water type fire extinguisher For every 600 Sq.Mtrs of floor area with Minimum of four numbers fire extinguisher Per flood and 5 kgs. DCP extinguisher minimum 2 Nos. each at Generator and Transformer area shall be provide as per alaram ISI specification No.2190-1992.

14. Manually operated and alaram system in the Entire building; Seperate Underground static Water storage ... capacity Seperate Terrace tank ... Capacity for Residential Biuildings, House Reai Down Com

15. Automatic Sprinkler systems is to e provided If the basement area exceeds 200 Sq. mtrs Electrical wiring and installtion shall be Cerufied by the electrical engineers to Ensure electrical fire safety.

16 To create a joint open spaces with the Neighbours building / premises for Manoeuverability of fire vehicles. No parking Orany constructions shall be made in setbacks area

17. Transformers shall be provided with 4 hours Rating fire resistant constructions as per Rule 15(e) of A.P Apartments (Promotion of construction and ownership) rules 1987

18. To provide one entry and an exit To the premises with a minimum Width of 4.5 mtrs and height Clearance of 5 mtrs.

19. To provide sewerage treatment plant for recyclim Of sewage water for usage of recycled water for Gardening etc. as per APPCB Norms.

20. Provide Fire resistant swing DOOR For the collapsible life in all floors Provide Generator, as alternate Source of electric supply. Emergency Lighting in the corridors/common Passage and st...

For METROPOLITAN COMMISSIONER
Hyderabad Metropolitan Development Authority

TITLE	SHEET NO. 2, TOTAL No. OF SHEETS : 6

PLAN SHOWING THE PROPOSED CONSTRUTCION OF RESEDENTIAL APARTMENT IN SY.NO.121/PART, SITUATED AT TATIANARAM VILLAGE, ABDULAPURMET MANDAL (PREVIOUSLY KNOWN AS HAYATHNAGAR MANDAL, RANGA REDDY DISTRICT.

BELONGING TO:

SRI C. AMARENDER REDDY & OTHERS REPRESENTED BY THEIR GPO HOLDER "NAMISHREE PROJECTS" REPRESENTED BY SRI. MOTILAL JAIN

SCHEDULE OF OPENINGS

MAIN DOOR (MD)	: 1.07M X 2.4M
SINGLE FLUSH DOOR (D1)	: 0.90M X 2.1M
SINGLE FLUSH DOOR (D2)	: 0.75M X 2.1M
SINGLE FLUSH DOOR (D3)	: 1.10M X 2.1M
SLIDING DOOR (SD1)	: 2.40M X 2.4M
SLIDING DOOR (SD2)	: 1.20M X 2.4M
FIRE DOOR (FRD)	: 1.20M X 2.4M
SLIDING WINDOW (W1)	: 1.80M X 1.50M
SLIDING WINDOW (W2)	: 1.20M X 1.50M
SLIDING WINDOW (W3)	: 0.75M X 1.20M
SLIDING WINDOW (KW)	: 1.20M X 1.50M
VENTILATOR (V)	: 0.60M X 1.20M

AREA STATEMENT

TOTAL LAND AREA :6.15 ACRES (OR) 29789.18 SYD (OR) 24907.34 SMT
ROAD WIDENING AREA : 95.97 SYD (OR) 80.24 SMT
NET LAND AREA : 29693.21 SYD (OR) 24827.10 SMT

BLOCK A
GROUND FLOOR : 128.42 SMT
TYPICAL FLOOR AREA : 955.02 SMT x 24 = 22,920.48 SMT
NINETEENTH FLOOR AREA : 1004.81 SMT
TOTAL BUILT-UP AREA : 24,053.71 SMT

BLOCK B
GROUND FLOOR : 128.42 SMT
TYPICAL FLOOR AREA : 955.02 SMT x 24 = 22,920.48 SMT
NINETEENTH FLOOR AREA : 1004.81 SMT
TOTAL BUILT-UP AREA : 24,053.71 SMT

BLOCK C
GROUND FLOOR : 128.42 SMT
TYPICAL FLOOR AREA : 955.02 SMT x 24 = 22,920.48 SMT
NINETEENTH FLOOR AREA : 1004.81 SMT
TOTAL BUILT-UP AREA : 24,053.71 SMT

BLOCK D
GROUND FLOOR : 128.42 SMT
TYPICAL FLOOR AREA : 955.02 SMT x 24 = 22,920.48 SMT
NINETEENTH FLOOR AREA : 1005.29 SMT
TOTAL BUILT-UP AREA : 24,054.19 SMT

BLOCK E
GROUND FLOOR : 128.42 SMT
TYPICAL FLOOR AREA : 955.02 SMT x 24 = 22,920.48 SMT
NINETEENTH FLOOR AREA : 1005.29 SMT
TOTAL BUILT-UP AREA : 24,054.19 SMT

TOTAL AREA (BLOCKS A, B, C, D & E) : 1,20,269.51 SMT
AMENITIES BLOCK AREA REQUIRED 3% OF 1,20,269.51 : 3608.08 SMT
AMENITIES BLOCK AREA PROVIDED : 6085.01 SMT

PARKING AREA REQUIRED
PARKING AREA REQUIRED(RESIDENTIAL) : 22% = 28467.27 SMT
PARKING AREA PROVIDED : 37236.70 SMT
CELLAR FLOOR AREA : 18733.60 SMT
SUB CELLAR FLOOR AREA : 18503.10 SMT

VENTILATION REQUIRED 2.5% OF CELLAR AREA : 490.71 SMT
VENTILATION PROVIDED OF CELLAR AREA : 547.04 SMT

TOT-LOT REQUIRED 10% OF NET LAND AREA : 2484.874SMT
TOT-LOT PROVIDED : 2527.07 SMT

TOTAL NO OF UNITS: 625, LARGE UNITS=500, SMALL UNITS=125
TOTAL NO OF CARS:

BASEMENT-1=496 NOS
BASEMENT-2=496 NOS
SURFACE PARKING=119 NOS
TOTAL NO OF CARS (PROVIDED) = 1111 NOS

10% MORTGAGE AREA REQUIRED : 12635.42 SMT
5% MORTGAGE AREA REQUIRED : 6317.71 SMT

TOTAL MORTGAGE AREA REQUIRED : 18953.13 SMT
TOTAL MORTGAGE AREA PROVIDED : 19294.50 SMT

TOTAL NO OF FLOORS

BLOCK A,B,C,D&E - SUB CELLAR+CELLAR+GROUND+25 FLOORS

OWNER'S SIGN — For NAMISHREE PROJECTS, Partner

BUILDER'S SIGN — For Namishree Infrastructure & Projects Pvt. Ltd., Managing Director

STRUCTURAL CONSULTANT

ARCHITECT — Sanjay Kothari Planners Designers Private Limited, CHENNAI 600 041

Scale : As indicated
Date : 18/07/2023

NORTH

CELLAR FLOORPLAN - 1